


Data sheet

Commercial Art.No.: 56.704.5055.0

Feed-through terminal WKFN 4 D1/2/35

Feed-through terminal with tension spring connection for mounting on TS35, nominal cross section: 4 mm², width: 6 mm, color: grey



Commercial Art.No.	56.704.5055.0
EAN	4015573767119
Order Unit	100

Certificates / Approvals



Technical data

General

Nominal cross section	4 mm ²
Colour	Grey
Number of levels	1
Number of clamp positions per level	3
Width/grid dimension	6 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	Yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated current	32 A
Rated voltage	800 V
Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	Yes
Type of insulation material	Thermoplastic
Length	66.6 mm
Width	6 mm
Height	37.3 mm

Connection Data

Connection type 1	Spring clamp connection
Connection type 2	Spring clamp connection
Minimum cross section solid	0.13 mm ²
Maximum cross section solid	6 mm ²
Minimum cross section fine stranded	0.13 mm ²
Maximum cross section fine stranded	4 mm ²

Wire strip length	11 mm
-------------------	-------

Technical Data UL/CSA

Cross section UL	24-10 AWG
Voltage UL	600 V
Current factory wiring	30 A
Current field wiring	30 A
Cross section CSA	24-10 AWG
Voltage CSA	600 V
Current CSA	32 A

Note

Remark to rated voltage	CSA 300V/600V
-------------------------	---------------


Classification

ECLASS 8.1	27141120
ETIM 7.0	EC000897
ETIM 6.0	EC000897
ETIM 5.0	EC000897
ETIM 4.0	EC000897

Accessories


Commercial Art.No.:	Article-type description:	Description:
Z7.261.1227.0	Jumper bar IVB WKF 4 - 2	Cross connector, insulated for DIN rail terminal blocks type WKF..., 2 -pole
Z7.261.1327.0	Jumper bar IVB WKF 4 - 3	Cross connector, insulated for DIN rail terminal blocks type WKF..., 3 -pole
Z7.261.1427.0	Jumper bar IVB WKF 4 - 4	Cross connector, insulated for DIN rail terminal blocks type WKF..., 4 -pole
Z7.261.1527.0	Jumper bar IVB WKF 4 - 5	Cross connector, insulated for DIN rail terminal blocks type WKF..., 5 -pole
Z7.261.1627.0	Jumper bar IVB WKF 4 - 6	Cross connector, insulated for DIN rail terminal blocks type WKF..., 6 -pole
Z7.261.1727.0	Jumper bar IVB WKF 4 - 7	Cross connector, insulated for DIN rail terminal blocks type WKF..., 7 -pole
Z7.261.1827.0	Jumper bar IVB WKF 4 - 8	Cross connector, insulated for DIN rail terminal blocks type WKF..., 8 -pole
Z7.261.1927.0	Jumper bar IVB WKF 4 - 9	Cross connector, insulated for DIN rail terminal blocks type WKF..., 9 -pole
Z7.261.2027.0	Jumper bar IVB WKF 4 - 10	Cross connector, insulated for DIN rail terminal blocks type WKF..., 10 -pole
98.300.0000.0	Mounting rail TS 35x7,5 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1000.0	Mounting rail TS 35x7,5 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1900.0	Mounting rail TS 35x7,5 PERF 25mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0000.0	Mounting rail TS 35x15-2,3 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0004.0	Mounting rail TS 35x15-2,3 UNPERF FZN - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel, hot galvanized
98.370.0000.0	Mounting rail TS 35x15 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.370.1000.0	Mounting rail TS 35x15 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.380.0000.0	Mounting rail TS 35x15-2,3 UNPERF CU - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material E copper
04.343.6153.8	Warning cover ADF 4/4 GELB	Cover with warning symbol for DIN rail terminal blocks type WKF ...
Z5.553.2921.0	Test plug ST 2 / 2.3 ROT	Test plug 2.3 mm, color: red

07.312.9455.0	End plate APFN 4 D1/2/35	End plate for DIN rail terminal blocks type WKFN 4 D1/2..., color: grey
07.312.9455.6	End plate APFN 4 D1/2/35 BLAU	End plate for DIN rail terminal blocks type WKFN 4 D1/2..., color: blue
07.312.9455.7	End plate APFN 4 D1/2/35 GRUEN	End plate for DIN rail terminal blocks type WKFN 4 D1/2..., color: green
07.312.9555.0	Partition TWFN 4 D1/2/35	Partition for DIN rail terminal blocks type WKFN 4 D1/2..., color: grey
Z5.522.7453.0	End bracket 9708 / S35	End clamp for mounting rail TS 35
Z5.522.8553.0	End bracket 9708 / 2 S 35	End clamp for mounting rail TS 35
Z5.523.5653.0	End bracket WE 2/U	End clamp for mounting rail TS 35 and TS 32
Z5.523.5753.0	End bracket WE 1/U	End clamp for mounting rail TS 35 and TS 32
Z5.523.9353.0	End bracket WEF 1/35	End clamp for mounting rail TS 35

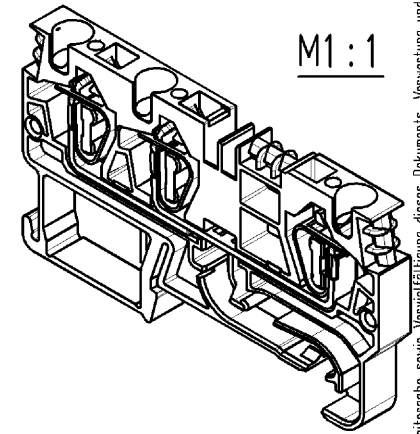

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

- Hutschiene EN 60715-35x15
mounting rail EN 60715-35x15



Teile-Nr. <i>part-no.</i>	Farbe <i>colour</i>	Typ <i>type</i>
56.704.5055.0	grau <i>grey</i>	WKFN 4 D1/2/35
56.704.5055.1	schwarz <i>black</i>	WKFN 4 D1/2/35 SCHWARZ
56.704.5055.5	rot <i>red</i>	WKFN 4 D1/2/35 ROT
56.704.5055.6	blau <i>blue</i>	WKFN 4 D1/2/35 BLAU

Weitere Daten siehe Katalog
further data see catalog

Tolerierung Size ISO 14405 (E) / Tolerance system ISO 14405 (E). (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☒ Stoffverbots- und Deklarationsliste nach UN-TQM-05/03 ist einzuhalten. Conformity with Wieland document UN-TQM-05/03 (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach DIN ISO 2768 - m General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1. Verwendung: - First Use:		Blatt: 1 von 1 Sheet: 1 of 1		
		/		Werkstoff/Material	2004	Tag/Date	Name	T	Zeichnung Nr./Drawing No. 56.704.5055.0 01K	Index a
		/			gezeichnet drawn	12.03.	Bauer F.			
		/			geprüft checked	-	-			
		/			Normgepr. Stand. check	-	-			
		/			Maße in mm/Dimensions are in mm					
		/	Vol.	mm³	Öfl./Surf.	mm²	Ersatz für/Replacement for: -			
		/	 wieland			Type	Benennung/Title			
a	21.11.2012/					WKFN 4 D1/2/35..	DUO_DURCHGANGSKLEMME fasis pro Federkraftausführung 4mm² duo-terminal with spring clamp connection			
Index	Datum / Blatt Date / Sheet									
Änderung/Revision										