

Data sheet

Commercial Art.No.: 70.310.4840.0

Male insert BAS STS 48 2,5 50

revos BASIC 500V 48 pole + ground, male insert 500V/16A with wire protection, Sn screw connection

1011011010001010010101101
0100110110010110100101010
101001101100111001010010
10101001101100101001010
1101010011011001011010010
10101010010101101010011

DIGITALIZATION IN PROGRESS

Commercial Art.No.	70.310.4840.0
EAN	4015573219939
Order Unit	1

Certificates / Approvals



Technical data

General

Model	Pin insert
Inflammability class of insulation material acc. with UL94	V0
Colour	Grey
Mating cycles	200
Pollution degree	3
Modular version	No
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

Connection Data

Connection type	Screw connection
Number of poles	48
Plus switching contacts	0
Number of pole for rated current 2	0
Number of pole for rated current 3	0
Total number of poles (without ground contact)	48
With wire protection	Yes
Min. conductor diameter rigid (solid/stranded)	0.5 mm ²
Max. conductor diameter rigid (solid/stranded)	2.5 mm ²
Protective contact	Yes

Technical Data UL/CSA

Rated voltage according to UL/CSA	600 V
Rated current according UL	16 A
Rated current according CSA	16 A
Min. conductor cross section flexible wire	0.5 mm ²
Max. conductor cross section flexible wire	2.5 mm ²
Conductor cross section flexible AWG wire	22-14 AWG

Model

With housing	No
--------------	----

Contacts

Contact material	Copper alloy
Surface	Tin-plated
Contact resistance	$\leq 1.5 \text{ m}\Omega$
Wire strip length	7 mm

Screws head design/recomm. Torque

Mounting screws	H1/0.5-0.7 Nm
Clamping screws	H1/0.5-0.7 Nm
Ground conductor screws	H2/1.2-1.6 Nm

Technical Data DIN EN 61984

Nominal voltage	500 V
Rated voltage face/ground	500 V
Nominal current	16 A
Rated impulse voltage	6 kV


Classification

ECLASS 8.1	27440205
ETIM 7.0	EC000438
ETIM 6.0	EC000438
ETIM 5.0	EC000438
ETIM 4.0	EC000438
ETIM 3.0	EC000438



Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße

Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

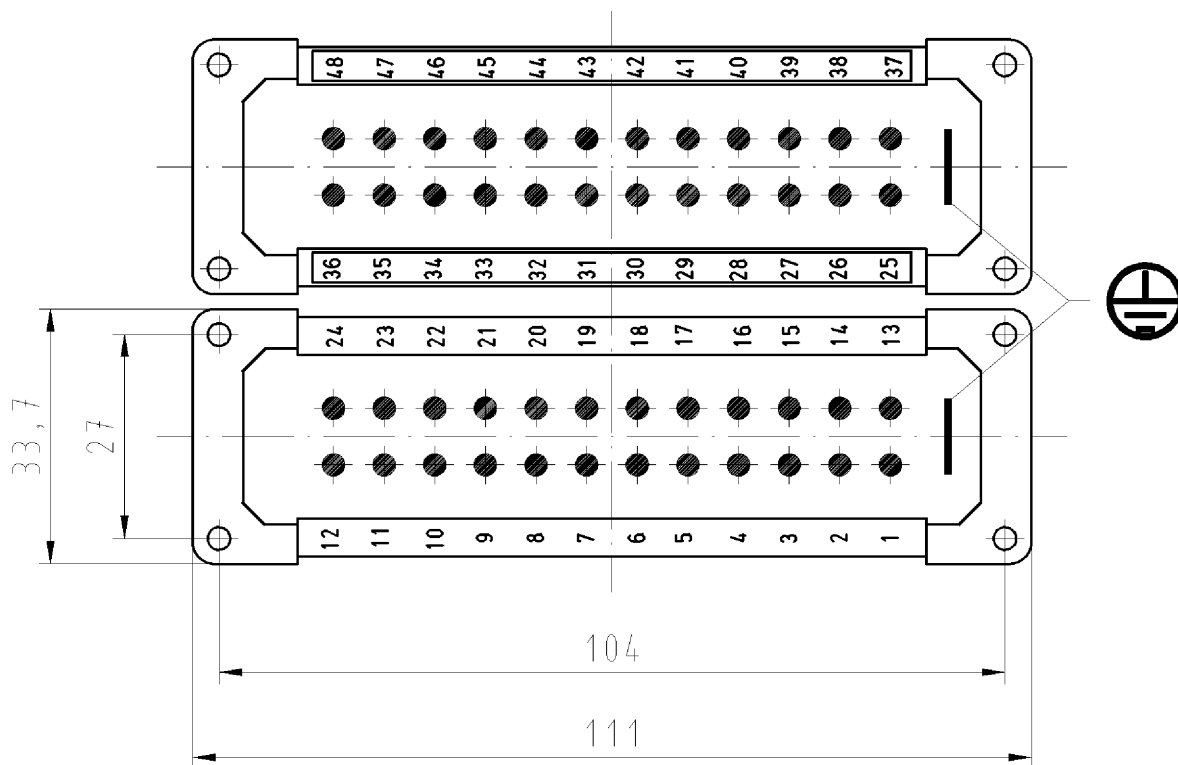

Weitere Daten siehe Katalog
further data see catalog

Freitoleranz nach DIN				CAD - Zeichnung, keine manuellen Änderungen				1.Verwendung: -		Bl.: 1 von 1	
	/	Maßstab 1:1	Werkstoff und Oberfläche:	2005	Tag	Name	Zeichnung Nr. 70.310.4840.0 01K	Index			
	/			Entworfen	14.06.	Schmitt J.					
	/			Geprüft	-	-					
	/			Normgepr.	-	-					
	/	 wieland Elektrische Verbindungen		Ersatz für: -							
	/			Benennung STECKERE INSATZ Schraubanschluß / screw connection plug insert 500V 16A							
	/										
Buchstabe	Datum / Blatt										
Änderung											

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.