

Data sheet

Commercial Art.No.: 70.342.0635.0

Bottom BAS GUT GT 6 M20 A0

revos BASIC size 6 closed-bottom base with cable gland M20, right, with cover, single locking lever

1011011010001010010101101
0100110110010110100101010
101001101100111001010010
101010010101010101010010
1101010011011001011010010
10101010010101101010011

DIGITALIZATION IN PROGRESS

Commercial Art.No.	70.342.0635.0
EAN	4015573618152
Order Unit	1

Technical data

General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	IP54
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

Model

DIN-size	6
Model	Surface mounting (base)
Locking mechanism	Single locking lever
Cable entry	Sideways
Type of cable	Gland nut
With cable screw gland	Yes
Thread size M	20
Thread size PG	
Hinged lid	Yes
EMC-version	No
Length	84 mm
Width	52 mm
Height	54.5 mm




Classification

ECLASS 8.1	27440202
ETIM 7.0	EC000437
ETIM 6.0	EC000437
ETIM 5.0	EC000437
ETIM 4.0	EC000437



ETIM 3.0	EC000437
----------	----------

Fits with

Commercial Art.No.:	Article-type description:	Description:
70.350.0635.0	Hood BAS GOT GG 6 M20 A0	revos BASIC size 6 hood with cable gland M20, lateral cable entry, single locking lever
70.350.0635.1	Hood BAS GOT GG 6 M20 A1	revos BASIC size 6 hood with threaded collar M20, lateral cable entry, single locking lever
70.350.0635.2	Hood BAS GOT GG 6 M20 A2	revos BASIC size 6 hood with intermediate support M20, lateral cable entry, single locking lever
70.352.0635.0	Hood BAS GOT GI 6 M20 A0	revos BASIC size 6 hood with cable gland M20, top cable entry, single locking lever
70.352.0635.1	Hood BAS GOT GI 6 M20 A1	revos BASIC size 6 hood with threaded collar M20, top cable entry, single locking lever
70.352.0635.2	Hood BAS GOT GI 6 M20 A2	revos BASIC size 6 hood with intermediate support M20, top cable entry, single locking lever
70.353.0635.0	Hood BAS GOT GG 6 M25 A0	revos BASIC size 6 hood with cable gland M25, lateral cable entry, single locking lever
70.353.0635.1	Hood BAS GOT GG 6 M25 A1	revos BASIC size 6 hood with threaded collar M25, lateral cable entry, single locking lever
70.353.0635.2	Hood BAS GOT GG 6 M25 A2	revos BASIC size 6 hood with intermediate support M25, lateral cable entry, single locking lever
70.354.0635.0	Hood BAS GOT GI 6 M25 A0	revos BASIC size 6 hood with cable gland M25, top cable entry, single locking lever
70.354.0635.1	Hood BAS GOT GI 6 M25 A1	revos BASIC size 6 hood with threaded collar M25, top cable entry, single locking lever
70.354.0635.2	Hood BAS GOT GI 6 M25 A2	revos BASIC size 6 hood with intermediate support M25, top cable entry, single locking lever
73.350.0635.0	Hood BAS GOT GG 6HM25 69 A0	revos BASIC size 6H hood with cable gland M25, lateral cable entry, high design, single locking lever
73.350.0635.1	Hood BAS GOT GG 6HM25 69 A1	revos BASIC size 6H hood with threaded collar M25, lateral cable entry, high design, single locking lever
73.351.0635.0	Hood BAS GOT GH 6HM20 A0	
73.351.0635.1	Hood BAS GOT GH 6HM20 A1	
73.351.0635.3	Hood BAS GOT GH 6HM20 A3	
73.352.0635.0	Hood BAS GOT GI 6HM25 69 A0	revos BASIC 500V size 6H hood with cable gland M25, top cable entry, high design, single locking lever
73.352.0635.1	Hood BAS GOT GI 6HM25 69 A1	revos BASIC 500V size 6H hood with threaded collar M25, top cable entry, high design, single locking lever
73.352.0635.2	Hood BAS GOT GI 6HM25 69 A2	revos BASIC size 6H hood with intermediate support M25, top cable entry, high design, single locking lever
73.353.0635.0	Hood BAS GOT GG 6HM32 69 A0	revos BASIC size 6H hood with cable gland M32, lateral cable entry, high design, single locking lever
73.353.0635.1	Hood BAS GOT GG 6HM32 69 A1	revos BASIC size 6H hood with threaded collar M32, lateral cable entry, high design, single locking lever
73.353.0635.2	Hood BAS GOT GG 6HM32 69 A2	revos BASIC 500V size 6H hood with intermediate support M32, top cable entry, high design, single locking lever
73.354.0635.0	Hood BAS GOT GI 6HM32 69 A0	revos BASIC 500V size 6H hood with cable gland M32, top cable entry, high design, single locking lever
73.354.0635.1	Hood BAS GOT GI 6HM32 69 A1	revos BASIC 500V size 6H hood with threaded collar M32, top cable entry, high design, single locking lever
73.354.0635.2	Hood BAS GOT GI 6HM32 69 A2	revos BASIC size 6H hood with intermediate support M32, top cable entry, high design, single locking lever

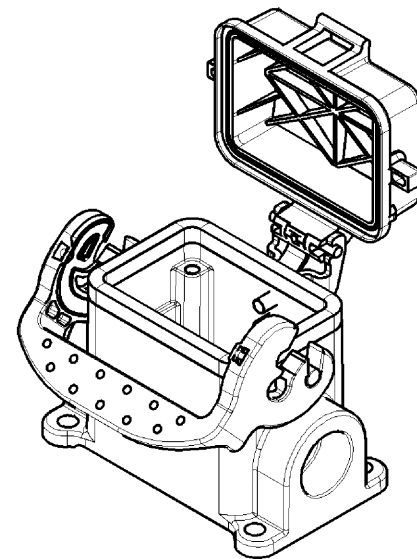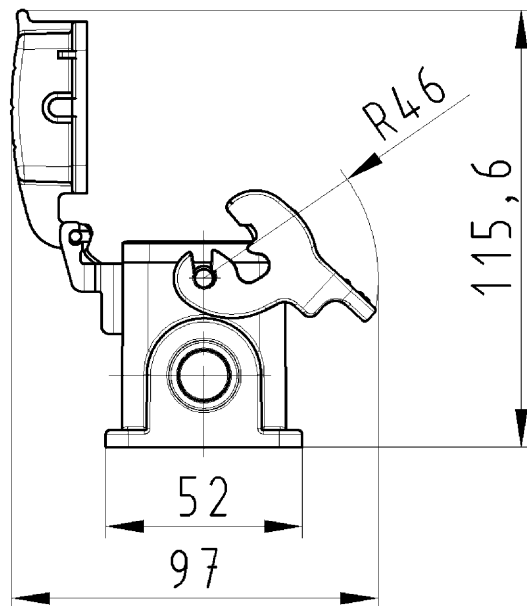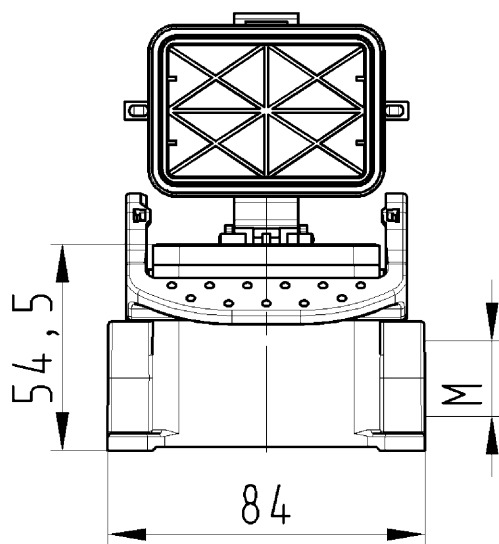

Varianten/Variants
.0

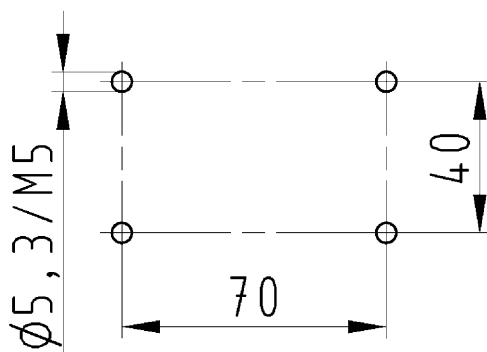

Bohrbild
/Cut out

70.342.0635.1	BAS GUT GT 6 M20 A 1	Gewindebohrung /Thread hole	X
70.342.0635.0	BAS GUT GT 6 M20 A 0	Kabelverschraubung(KV), IP54 montiert /Cable gland{CG}, IP54 assembled	
Bestellnummer /Order number	Typ /Type	Varianten /Variants	dar- gestellt /drawn
Weitere Daten siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog.		www.wieland-electric.com eshop.wieland-electric.com	

Tolerierung Size ISO 14405(®)/Tolerance system Size ISO 14405(®). (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).										ja/yes ☒ Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. Conformity with Wieland document UU-TQM-05/03 (list of prohibited / declaimable hazardous substances) to be declared!									
Freitoleranz nach General tolerance					CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed					1.Verwendung: First Use: -					Blatt: 1 von 1 Sheet: of 1				
	/		Werkstoff/Material			2013	Tag/Date	Name		Zeichnung Nr./Drawing No. 70.342.0635.0 13K						Index			
	/		Aluminium			gezeichnet drawn	21.05.	Treschan											
	/		beschichtet/coated			geprüft checked	-	-											
	/		Maßstab/Scale 1:2	grau/grey			Normgepr. Stand. check	-	-		Maße in mm/Dimensions are in mm								
	/																		
	/	Vol.	mm³	Ofl./Surf.	mm²	Ersatz für/Replacement for: -													
	/		wieland			Type revos BASIC		Benennung/Title GEHAEUSEUNTERTEIL Baugröße 6-Kabelabgang 1x M20 rechts Housing size 6-cable outlet 1x M20 right											
	/																		
	/																		
Index	Datum / Blatt Date / Sheet																		
Änderung/Revision																			

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.