

Data sheet

Commercial Art.No.: 70.358.1035.0

Hood BAS GOT GD 10 M25 A0

revos BASIC size 10 hood with cable gland M25, lateral cable entry, with locking levers, double locking lever



Commercial Art.No.	70.358.1035.0
EAN	4015573650947
Order Unit	1

Technical data

General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	IP54
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

Model

DIN-size	10
Model	male
Locking mechanism	Double locking levers
Cable entry	Sideways
Type of cable	Gland nut
With cable screw gland	Yes
Thread size M	25
Thread size PG	
Hinged lid	No
EMC-version	No
Length	73 mm
Width	56 mm
Height	53 mm



Classification

ECLASS 8.1	27440202
ETIM 7.0	EC000437
ETIM 6.0	EC000437
ETIM 5.0	EC000437
ETIM 4.0	EC000437


ETIM 3.0	EC000437
----------	----------

Fits with

Commercial Art.No.:	Article-type description:	Description:
70.325.1028.0	Bottom BAS GUT GE 10 A	revos BASIC size 10 open-bottom base, with cover, double locking lever
70.340.1035.0	Bottom BAS GUT GF 10 M20 A0	revos BASIC size 10 closed-bottom base with 2 cable glands M20, with cover, double locking lever
70.340.1035.1	Bottom BAS GUT GF 10 M20 A1	revos BASIC size 10 closed-bottom base with 2 threaded collars M20, with cover, double locking lever
70.341.1035.0	Bottom BAS GUT GG 10 M20 A0	revos BASIC size 10 closed-bottom base with cable gland M20, left, with cover, double locking lever
70.341.1035.1	Bottom BAS GUT GG 10 M20 A1	revos BASIC size 10 closed-bottom base with threaded collar M20, left, with cover, double locking lever
70.342.1035.0	Bottom BAS GUT GH 10 M20 A0	revos BASIC size 10 closed-bottom base with cable gland M20, right, with cover, double locking lever
70.342.1035.1	Bottom BAS GUT GH 10 M20 A1	revos BASIC size 10 closed-bottom base with threaded collar M20, right, with cover, double locking lever
70.343.1035.0	Bottom BAS GUT GI 10 M20 A0	revos BASIC size 10 closed-bottom base with cable gland M20, bottom, with cover, double locking lever
70.343.1035.1	Bottom BAS GUT GI 10 M20 A1	revos BASIC size 10 closed-bottom base with threaded collar M20, bottom, with cover, double locking lever

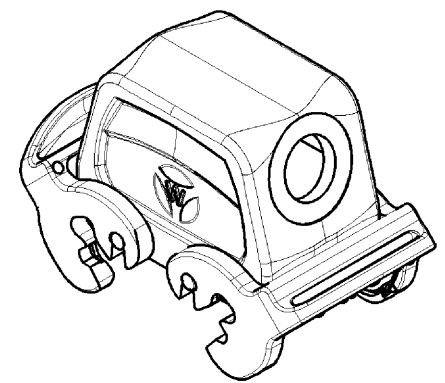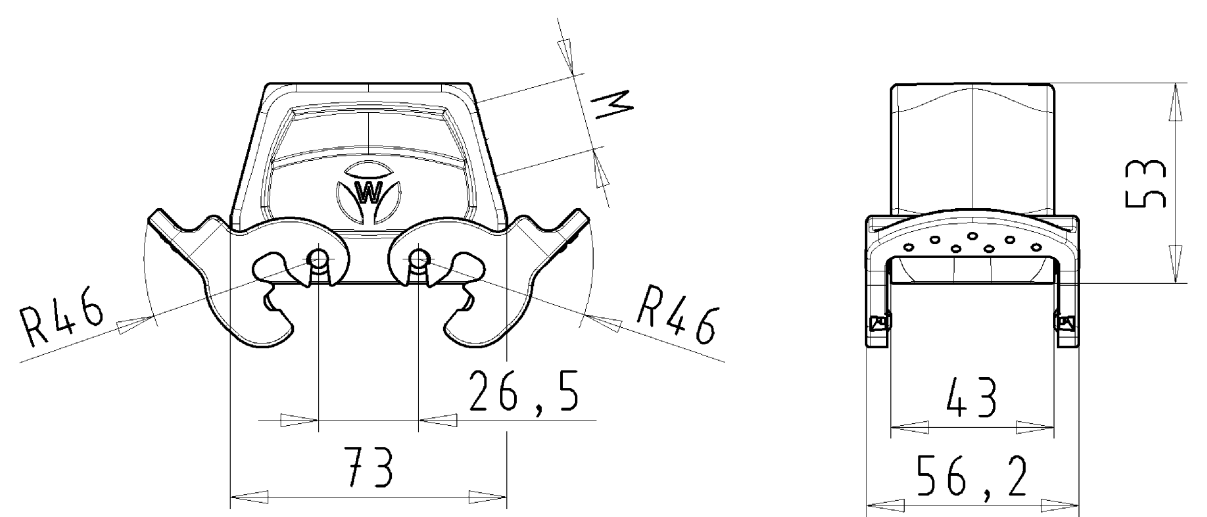

Varianten/ Variants

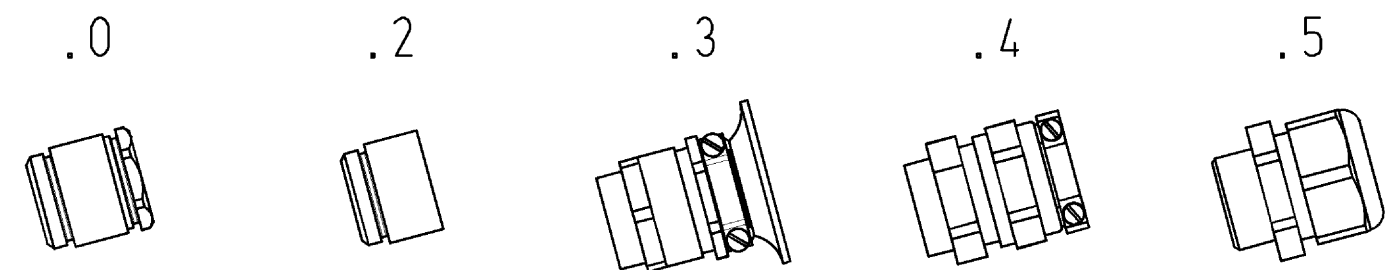

70.35 ⁸ ₅ .1035.5	BAS GOT GD 10	M25 M20	A 5	Kabelverschraubung(KV), IP65 /Cable gland(CG), IP65	
70.35 ⁸ ₅ .1035.4	BAS GOT GD 10	M25 M20	A 4	KV mit Zugentlastung, IP54 /CG with strain relief, IP54	
70.35 ⁸ ₅ .1035.3	BAS GOT GD 10	M25 M20	A 3	KV mit Zugentlastung und Knickschutz, IP54 /CG with strain relief and bend support, IP54	
70.35 ⁸ ₅ .1035.2	BAS GOT GD 10	M25 M20	A 2	Zwischenstutzen /Bushing	
70.35 ⁸ ₅ .1035.1	BAS GOT GD 10	M25 M20	A 1	Gewindebohrung /Thread hole	X
70.35 ⁸ ₅ .1035.0	BAS GOT GD 10	M25 M20	A 0	Kabelverschraubung(KV), IP54 /Cable gland(CG), IP54	
Bestellnummer /Order number	Typ /Type		Varianten /Variants		dar- gestellt /drawn
Weitere Daten siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog.				www.wieland-electric.com eshop.wieland-electric.com	

Tolerierung Size ISO 14405(®)/Tolerance system Size ISO 14405(®). (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).				ja/yes ☒ Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. Conformity with Wieland document UU-TQM-05/03 (list of prohibited / declaimable hazardous substances) to be declared!			
Freitoleranz nach General tolerance		CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed		1.Verwendung: - First Use:		Blatt: 1 von 1 Sheet: of 1	
		Werkstoff/Material Aluminium beschichtet/ coated grau/ grey		2013 gezeichnet drawn 21.08. geprüft checked Normgepr. Stand. check		Tag/Date Name Treschan	
		Maßstab/Scale 1:2				T 70.355.1035.0 13K	
		Vol. mm³		Ofl./Surf. mm²		Ersatz für/Replacement for: -	
		wieland Elektrische Verbindungen		Type revos BASIC		Benennung/Title GEHAEUSEOBERTEIL Baugröße 10-Kabelabgang seitlich-M20/M25 Hood size 10-cable outlet side-M20/M25	
Index		Datum / Blatt Date / Sheet					
Änderung/Revision							

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.