

## Data sheet

Commercial Art.No.: 71.331.2435.0

Bottom BAS GUT GM 24 M25 A0

revos BASIC size 24 closed-bottom base with cable gland M25, left, single locking lever

1011011010001010010101101  
0100110110010110100101010  
101001101100111001010010  
1010100101010101010101010  
1101010011011001011010010  
1010101010010101101010011

# DIGITALIZATION IN PROGRESS

Commercial Art.No.	71.331.2435.0
EAN	4015573621848
Order Unit	1

Certificates / Approvals



## Technical data

### General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	IP54
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

### Model

DIN-size	24
Model	Surface mounting (base)
Locking mechanism	Single locking lever
Cable entry	Sideways
Type of cable	Gland nut
With cable screw gland	Yes
Thread size M	25
Thread size PG	
Hinged lid	No
EMC-version	No
Length	144 mm
Width	57 mm
Height	57 mm

### Classification

ECLASS 8.1	27440202
ETIM 7.0	EC000437
ETIM 6.0	EC000437

ETIM 5.0	EC000437
ETIM 4.0	EC000437
ETIM 3.0	EC000437

## Fits with

Commercial Art.No.:	Article-type description:	Description:
71.350.2435.0	Hood BAS GOT GG 24 M25 A0	revos BASIC size 24 hood with cable gland M25, lateral cable entry, single locking lever
71.350.2435.1	Hood BAS GOT GG 24 M25 A1	revos BASIC size 24 hood with threaded collar M25, lateral cable entry, single locking lever
71.350.2435.2	Hood BAS GOT GG 24 M25 A2	revos BASIC size 24 hood with intermediate support M25, lateral cable entry, single locking lever
71.352.2435.0	Hood BAS GOT GI 24 M25 A0	revos BASIC size 24 hood with cable gland M25, top cable entry, single locking lever
71.352.2435.1	Hood BAS GOT GI 24 M25 A1	revos BASIC size 24 hood with threaded collar M25, top cable entry, single locking lever
71.352.2435.2	Hood BAS GOT GI 24 M25 A2	revos BASIC size 24 hood with intermediate support M25, top cable entry, single locking lever
71.353.2435.0	Hood BAS GOT GG 24 M32 A0	revos BASIC size 24 hood with cable gland M32, lateral cable entry, single locking lever
71.353.2435.1	Hood BAS GOT GG 24 M32 A1	revos BASIC size 24 hood with threaded collar M32, lateral cable entry, single locking lever
71.353.2435.2	Hood BAS GOT GG 24 M32 A2	revos BASIC size 24 hood with intermediate support M32, lateral cable entry, single locking lever
71.354.2435.0	Hood BAS GOT GI 24 M32 A0	revos BASIC size 24 hood with cable gland M32, top cable entry, single locking lever
71.354.2435.1	Hood BAS GOT GI 24 M32 A1	revos BASIC size 24 hood with threaded collar M32, top cable entry, single locking lever
71.354.2435.2	Hood BAS GOT GI 24 M32 A2	revos BASIC size 24 hood with intermediate support M32, top cable entry, single locking lever
76.350.6435.0	Hood BAS GOT GG 24HM25 50 A0	revos BASIC size 24H hood with cable gland M25, lateral cable entry, high design, single locking lever
76.350.6435.1	Hood BAS GOT GG 24HM25 50 A1	revos BASIC size 24H hood with threaded collar M25, lateral cable entry, high design, single locking lever
76.351.2435.0	Hood BAS GOT GH 24H M25 A0	
76.351.2435.1	Hood BAS GOT GH 24H M25 A1	
76.351.2435.3	Hood BAS GOT GH 24H M25 A3	
76.352.6435.0	Hood BAS GOT GI 24HM25 50 A0	revos BASIC size 24H hood with cable gland M25, top cable entry, high design, single locking lever
76.352.6435.1	Hood BAS GOT GI 24HM25 50 A1	revos BASIC size 24H hood with threaded collar M25, top cable entry, high design, single locking lever
76.353.6435.0	Hood BAS GOT GG 24HM32 50 A0	revos BASIC size 24H hood with cable gland M32, lateral cable entry, high design, single locking lever
76.353.6435.1	Hood BAS GOT GG 24HM32 50 A1	revos BASIC size 24H hood with threaded collar M32, lateral cable entry, high design, single locking lever
76.354.6435.0	Hood BAS GOT GI 24HM32 50 A0	revos BASIC size 24H hood with cable gland M32, top cable entry, high design, single locking lever
76.354.6435.1	Hood BAS GOT GI 24HM32 50 A1	revos BASIC size 24H hood with threaded collar M32, top cable entry, high design, single locking lever

☐ These dimensions will be especially checked at delivery

☐ Only inspection dimensions

☐ With *E* marked dimensions are only valid for internal use

☐ Diese Maße werden bei Abnahme besonders geprüft



☐ Ausschließlich Prüfmaße

Mit / E gekennzeichnete Maße sind nur für interne Zwecke gültig



With /E marked dimensions are only valid for internal use

Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

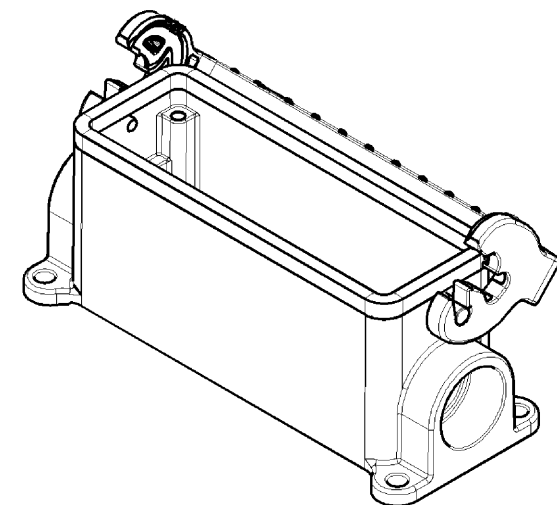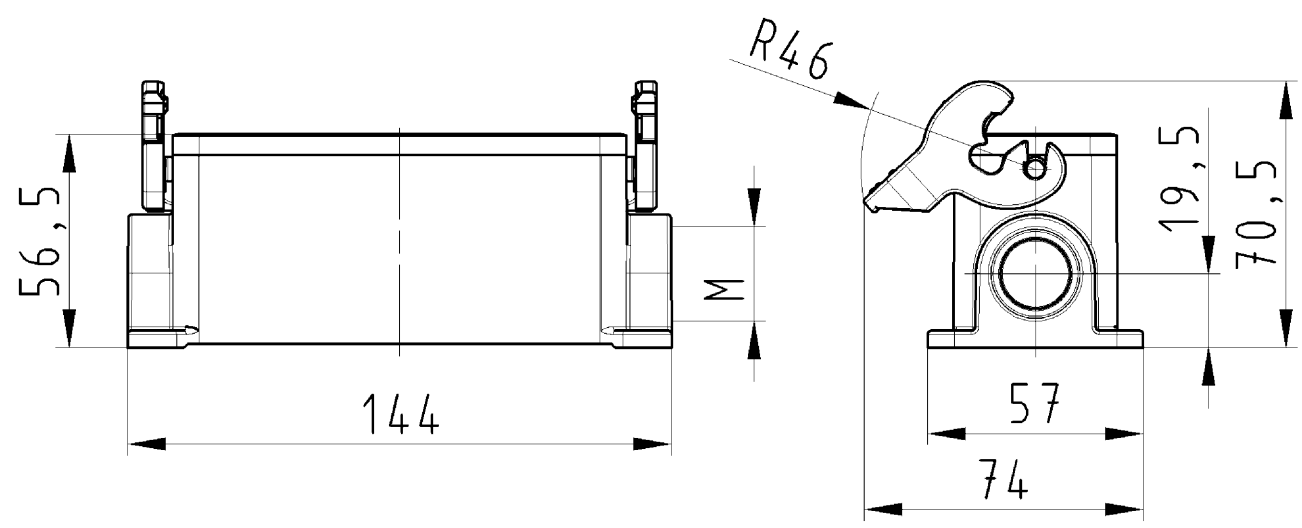

Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

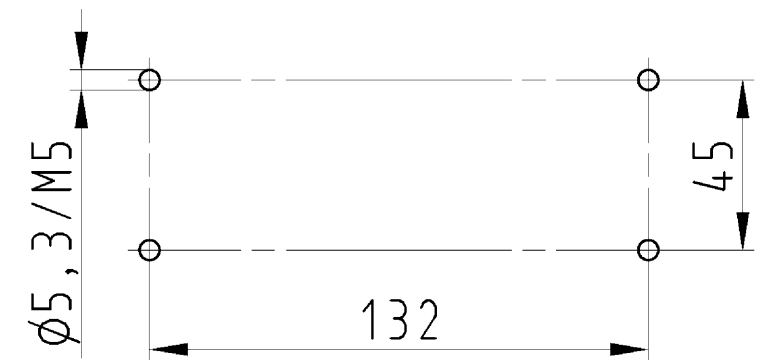

Varianten/Variants  
.0

Bohrbild  
/Cut out

71.331.2435.1	BAS GUT GM 24 M25 A 1	Gewindebohrung /Thread hole	X
71.331.2435.0	BAS GUT GM 24 M25 A 0	Kabelverschraubung(KV).IP54 montiert /Cable gland(CG).IP54 assembled	
Bestellnummer /Order number	Typ /Type	Varianten /Variants	der- gestell /drawn
Weitere Daten siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog.		www.wieland-electric.com eshop.wieland-electric.com	

Tolerierung Size ISO 14405 (C) / Tolerance system Size ISO 14405 (C). (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).						ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach UUT-QM-05/03 ist einzuhalten. Conformity with Wieland document UUT-QM-05/03 (list of prohibited / delectable hazardous substances) to be declared!					
Freitoleranz nach General tolerance				CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed				1. Verwendung: - First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
	/		Werkstoff/Material	2013	Tag/Date	Name	T	Zeichnung Nr./Drawing No.		Index	
	/		Aluminium	gezeichnet drawn	26.06.	Treschan		71.331.2435.0 13K			
	/		Maßstab/Scale	beschichtet/coated	geprüft checked	-		-			
	/		1:2	grau/grey	Normgepr. Stand. check	-		-	Maße in mm/Dimensions are in mm		
	/	Vol.	mm³	OfL./Surf.	mm²	Ersatz für/Replacement for: -					
	/		wieland	Type  revos	Benennung/Title  GEHAEUSEUNTERTEIL						
	/										
	/										
Index	Datum / Blatt Date / Sheet										
Änderung/Revision			Elektrische Verbindungen								