

Data sheet

Commercial Art.No.: 71.340.1035.0

Bottom BAS GUT GR 10 M20 A0

revos BASIC size 10 closed-bottom base with 2 cable glands M20, with cover, single locking lever

1011011010001010010101101
0100110110010110100101010
101001101100111001010010
1010100101010101010101010
1101010011011001011010010
1010101010010101101010011

DIGITALIZATION IN PROGRESS

Commercial Art.No.	71.340.1035.0
EAN	4015573624450
Order Unit	1

Certificates / Approvals



Technical data

General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	IP54
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C

Model

DIN-size	10
Model	Surface mounting (base)
Locking mechanism	Single locking lever
Cable entry	Two-sided
Type of cable	Gland nut
With cable screw gland	Yes
Thread size M	20
Thread size PG	
Hinged lid	Yes
EMC-version	No
Length	94 mm
Width	52 mm
Height	55 mm



Classification

ECLASS 8.1	27440202
ETIM 7.0	EC000437
ETIM 6.0	EC000437


ETIM 5.0	EC000437
ETIM 4.0	EC000437
ETIM 3.0	EC000437

Fits with


Commercial Art.No.:	Article-type description:	Description:
71.350.1035.0	Hood BAS GOT GG 10 M20 A0	revos BASIC size 10 hood with cable gland M20, lateral cable entry, single locking lever
71.350.1035.1	Hood BAS GOT GG 10 M20 A1	revos BASIC size 10 hood with threaded collar M20, lateral cable entry, single locking lever
71.350.1035.2	Hood BAS GOT GG 10 M20 A2	revos BASIC size 10 hood with intermediate support M20, lateral cable entry, single locking lever
71.352.1035.1	Hood BAS GOT GI 10 M20 A1	revos BASIC size 10 hood with threaded collar M20, top cable entry, single locking lever
71.352.1035.2	Hood BAS GOT GI 10 M20 A2	revos BASIC size 10 hood with intermediate support M20, top cable entry, single locking lever
71.353.1035.0	Hood BAS GOT GG 10 M25 A0	revos BASIC size 10 hood with cable gland M25, lateral cable entry, single locking lever
71.353.1035.1	Hood BAS GOT GG 10 M25 A1	revos BASIC size 10 hood with threaded collar M25, lateral cable entry, single locking lever
71.354.1035.0	Hood BAS GOT GI 10 M25 A1	revos BASIC size 10 hood with cable gland M25, top cable entry, single locking lever
71.354.1035.1	Hood BAS GOT GI 10 M25 A2	revos BASIC size 10 hood with threaded collar M25, top cable entry, single locking lever
76.350.1035.0	Hood BAS GOT GG 10HM25 50 A0	revos BASIC size 10H hood with cable gland M25, lateral cable entry, high design, single locking lever
76.350.1035.1	Hood BAS GOT GG 10HM25 50 A1	revos BASIC size 10H hood with threaded collar M25, lateral cable entry, high design, single locking lever
76.351.1035.0	Hood BAS GOT GH 10H M20 A0	
76.351.1035.1	Hood BAS GOT GH 10H M20 A1	
76.351.1035.3	Hood BAS GOT GH 10H M20 A3	
76.352.1035.0	Hood BAS GOT GI 10HM25 50 A0	revos BASIC size 10H hood with cable gland M25, top cable entry, high design, single locking lever
76.352.1035.1	Hood BAS GOT GI 10HM25 50 A1	revos BASIC 500V size 10H hood with threaded collar M25, top cable entry, high design, single locking lever
76.353.1035.0	Hood BAS GOT GG 10HM32 50 A0	revos BASIC size 10H hood with cable gland M32, lateral cable entry, high design, single locking lever
76.353.1035.1	Hood BAS GOT GG 10HM32 50 A1	revos BASIC size 10H hood with threaded collar M32, lateral cable entry, high design, single locking lever
76.353.1035.2	Hood BAS GOT GG 10HM32 50 A2	revos BASIC size 10H hood with cable gland M32, lateral cable entry, high design, single locking lever
76.354.1035.0	Hood BAS GOT GI 10HM32 50 A0	revos BASIC size 10H hood with cable gland M32, top cable entry, high design, single locking lever
76.354.1035.1	Hood BAS GOT GI 10HM32 50 A1	revos BASIC size 10H hood with threaded collar M32, top cable entry, high design, single locking lever
76.354.1035.2	Hood BAS GOT GI 10HM32 50 A2	revos BASIC 500V size 10H hood with intermediate support M32, top cable entry, high design, single locking lever

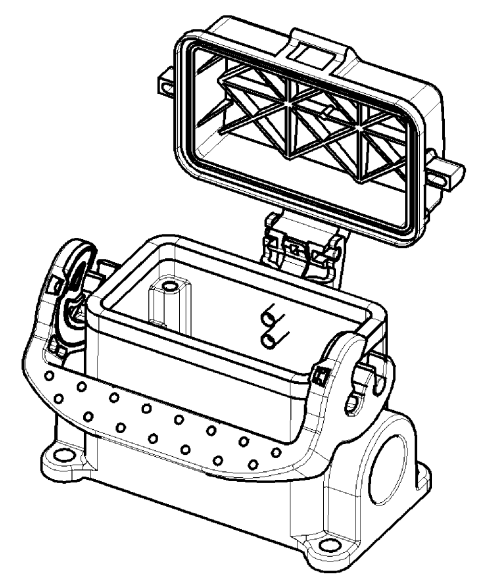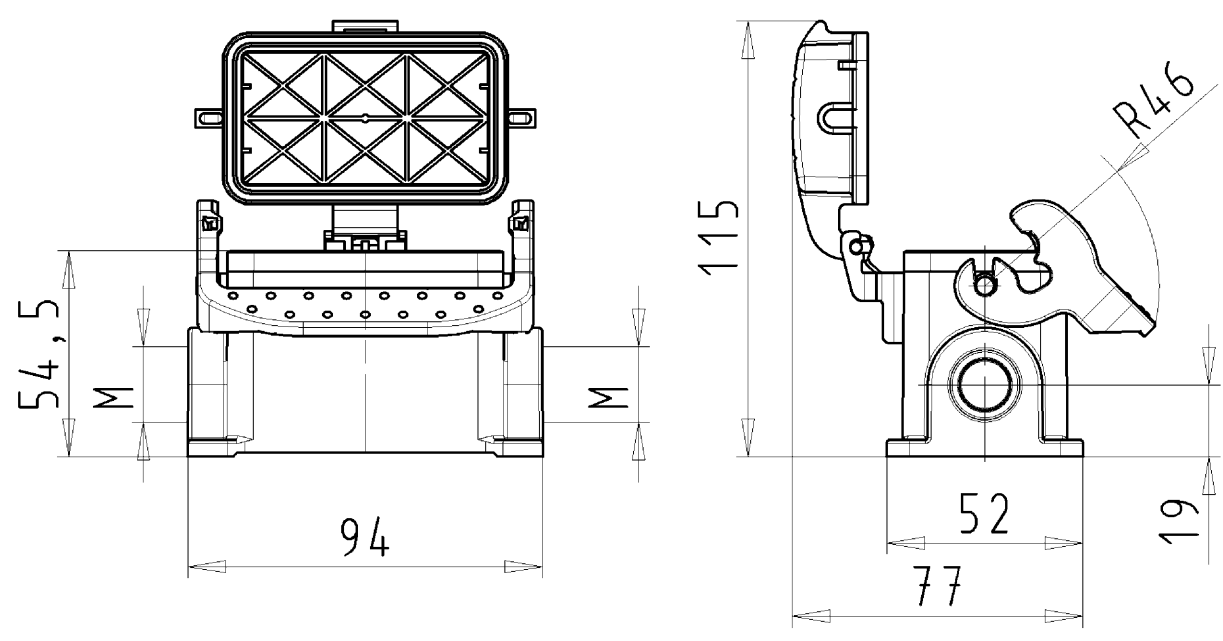



Varianten/Variants

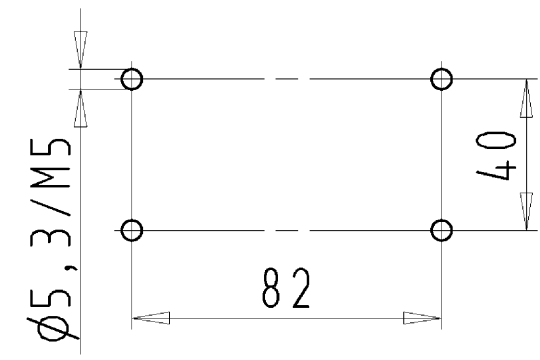

71.340.1035.1	BAS GUT GR 10 M20 A 1	Gewindebohrung /Thread Hole	X
71.340.1035.0	BAS GUT GR 10 M20 A 0	Kabelverschraubung(KV), IP54 montiert /Cable gland (CG), IP54 assembled	
Bestellnummer /Order number	Typ /Type	Varianten /Variants	dar- gestellt /drawn
Weitere Daten siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog.		www.wieland-electric.com eshop.wieland-electric.com	



Bohrbild /Cut out

Tolerierung Size ISO 14405 (E) / Tolerance system Size ISO 14405 (E). (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. Conformity with Wieland document UU-TQM-05/03 (list of prohibited / declaimable hazardous substances) to be declared!				
Freitoleranz nach General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1.Verwendung: - First Use:		Blatt: 1 von 1 Sheet: 1 of 1	
	/		Werkstoff/Material Aluminium beschichtet/coated grau/grey	2013	Tag/Date	Name	T	Zeichnung Nr./Drawing No. 71.340.1035.0 13K	Index
	/			gezeichnet drawn	28.06.	Duetsch			
	/ Maßstab/Scale			geprüft checked	-	-			
	/ 1:1			Normgepr. Stand. check	-	-			
Maße in mm/Dimensions are in mm									
	/	Vol.	mm³	Ofl./Surf.	mm²	Ersatz für/Replacement for: -			
	/		wieland		Type	Benennung/Title			
	/				revos BASIC	GEHAUSEUNTERTEIL Baugröße 10-Kabelabgang 2xM20 Housing size 10-cable outlet 2xM20			
	/								
Index	Datum / Blatt Date / Sheet								
Änderung/Revision		Elektrische Verbindungen							

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.