

## "CLG-L" LED LAMP

Description: **Led Lamp for inside enclosures**



**Type of material:**

casing in PC/ABS and diffuser in transparent polycarbonate

**Appliance class:**

class II

**Electrical connection:**

bipolar cable L= 1800mm with terminal bushing  
IP20

**Protection degree:**

from -10°C to +70°C

**Storage temperature:**

from -0°C to +50°C

**Operating temperature:**

from -0°C to +50°C

**Lifetime L10 at 40°C:**

20,000h

**Lum. Flux**

416 lm

**Led:**

0.5 W/led; 35 lm/led

**Ballast:**

electronic incorporated


**Switch:**

ON/OFF

**Approvals:**

CE

### technical drawing

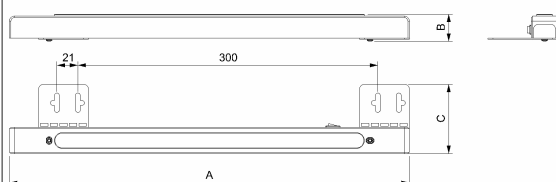

Model	Rated Voltage	Frequency	Watt	Dimensions (mm)			Weight	Led	
	(V)	(Hz)	(W)	A	B	C	(Kg)	N.	Color
CLG-L307	115-240 V a.c.	50/60	7	400	28	70	0.200	12	White