


# "E08BL" SERIES COSTECH FANS

Description: **EC Axial fan 80X80x38mm**

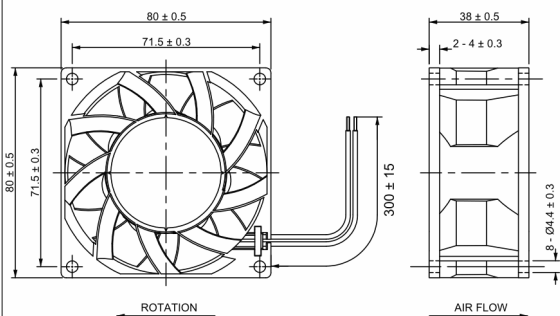

**Casing material:**

**Impeller material**

**Protection degree:**

**Fixing system:**

**Motor protection:**

**Storage temperature:**

**Rated temperature range:**

**Lifetime L10 at 25°C:**

**Electrical connection:**

**Approvals:**

**Weight:**

Thermoplastic in black color, UL 94 V-0

Thermoplastic in black color, UL 94 V-0

IP20, according to EN 60529 standard

by No 4 M4 screws

Impedance

From -40°C to +80°C



From -10°C to +70°C

50,000 h

2 leads 24 AWG UL1430

CE

0.270 kg

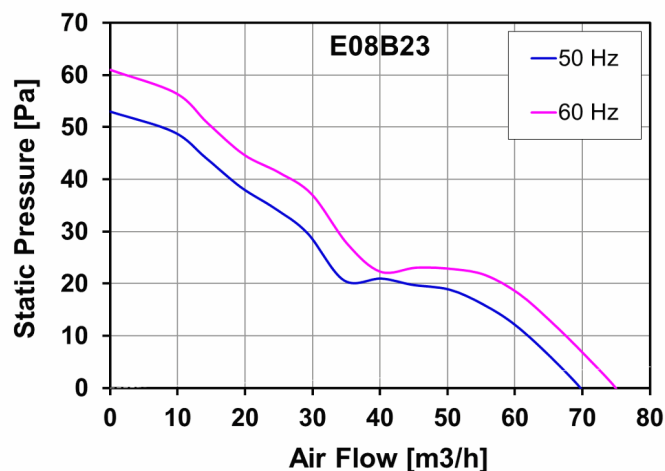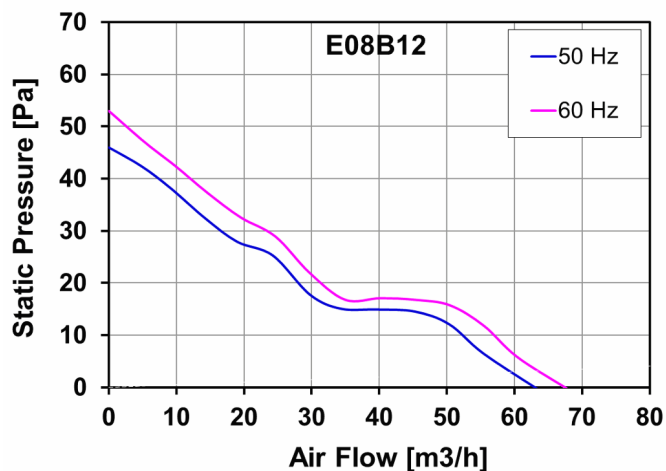

| Model        | Bearing | Voltage    | Frequency | Rated Current | Rated Power | Max Air Flow** | Static Pressure | Noise   | RPM         | Approvals |
|--------------|---------|------------|-----------|---------------|-------------|----------------|-----------------|---------|-------------|-----------|
|              |         | (V)        | (Hz)      | (A)           | (W)         | (m3/h)         | (Pa)            | [db(A)] | (rpm)       |           |
| E08B12HWBL00 | Ball    | 115 V a.c. | 50/60     | 0.06/0.06     | 5.0/5.0     | 64/68          | 46/53           | 35/37   | 2,800/3,000 | CE        |
| E08B23HWBL00 | Ball    | 230 V a.c. | 50/60     | 0.05/0.05     | 5.0/5.0     | 68/73          | 53/61           | 37/39   | 3,000/3,200 | CE        |

data with uncertainty of 15% (T) terminals (W) wires