



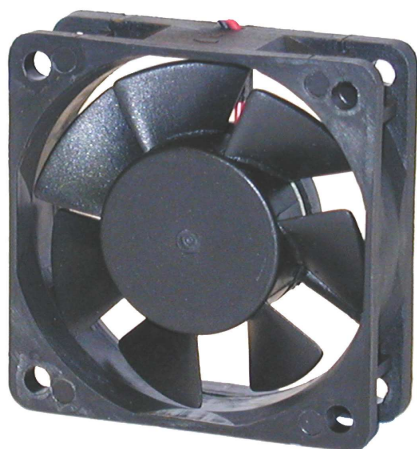

DRAWING

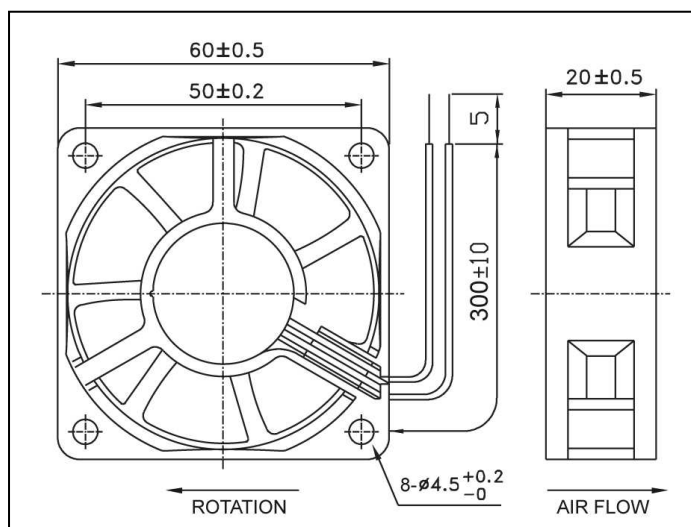


FEATURES

- Glass fibre reinforced plastic (PBT) fan casing and impeller.
- Brushless dc motor. I.C. protected against running overload.
- Electrical connection via 2 leads UL1007 AWG24, 300mm long.
- Rated temperature range:
Ball bearing from -20°C to +70°C
Sleeve bearing from -10°C to +60°C
- Service life L10:
Ball bearing 70,000 hours at 40°C
40,000 hours at t max
Sleeve bearing 50,000 hours at 40°C
35,000 hours at t max
- Weight 49g.

Please refer to our terms of sales including our warranty and limited liabilities clauses.

AIR FLOW CURVES

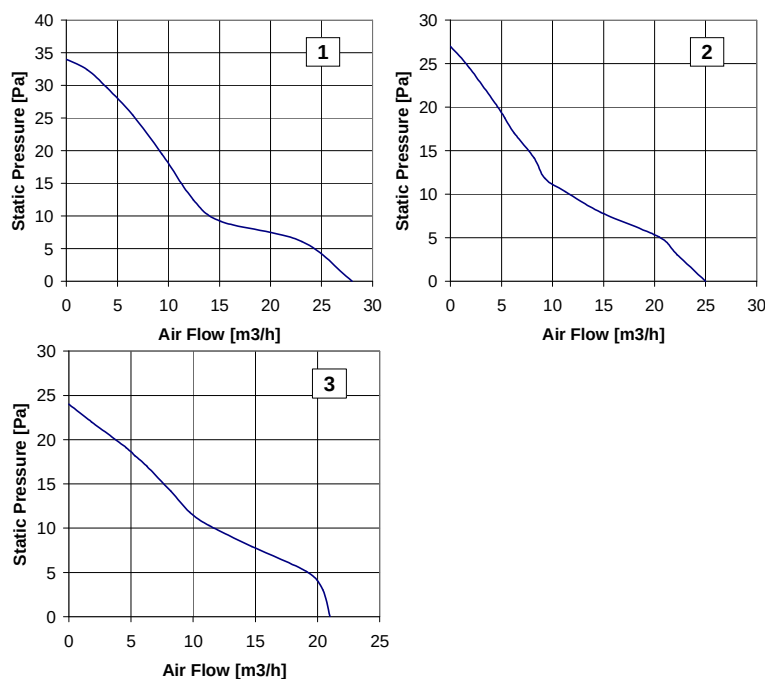

Model	Diagram	Bearing #		Rated Voltage [V]	Input Power [W]	Speed [rpm]	Air Flow [m3/h]	Static Pressure [Pa]	Noise [dB(A)]	Approvals		
		S	B							UL	CUL	TUV
D06D04HW#A00	1	★	★	12	1.9	4500	28	34	29.7	S,B		
D06D04MW#A00	2	★	★	12	1.6	3900	25	27	25.7	S,B		
D06D04LW#A00	3	★	★	12	1.0	3500	21	24	21.6	S,B		
D06D05HW#A00	1	★	★	24	2.2	4500	28	34	29.7	S,B		
D06D05MW#A00	2	★	★	24	1.4	3900	25	27	25.7	S,B		
D06D05LW#A00	3	★	★	24	1.7	3500	21	24	22.7	S,B		

“#” : S= Sleeve, B= Ball