




LAMPS WITH LED TECHNOLOGY

| LAMPES À LED | LED LAMPEN | LÁMPARAS DE LED | LAMPADE A LED |

LD.BA9S

Led lamps - High luminous intensity - Single chips - large angle - with bridge rectifier - no polarity

Dimensions mm



Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac/dc
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD BA9S R12 AC/DC	LD BA9S R28 AC/DC	LD BA9S R48 AC/DC	LD BA9S R130 AC/DC	LD BA9S R230 AC/DC
Green	LD BA9S G12 AC/DC	LD BA9S G28 AC/DC	LD BA9S G48 AC/DC	LD BA9S G130 AC/DC	LD BA9S G230 AC/DC
Yellow	LD BA9S Y12 AC/DC	LD BA9S Y28 AC/DC	LD BA9S Y48 AC/DC	LD BA9S Y130 AC/DC	LD BA9S Y230 AC/DC
Amber	LD BA9S A12 AC/DC	LD BA9S A28 AC/DC	LD BA9S A48 AC/DC	LD BA9S A130 AC/DC	LD BA9S A230 AC/DC
Blue	LD BA9S B12 AC/DC	LD BA9S B28 AC/DC	LD BA9S B48 AC/DC	LD BA9S B130 AC/DC	LD BA9S B230 AC/DC
White	LD BA9S W12 AC/DC	LD BA9S W28 AC/DC	LD BA9S W48 AC/DC	LD BA9S W130 AC/DC	LD BA9S W230 AC/DC

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive




Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD.E10

Led lamps - High luminous intensity - Single chips - large angle - with bridge rectifier - no polarity

Dimensions mm



Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac/dc
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD E10 R12 AC/DC	LD E10 R28 AC/DC	LD E10 R48 AC/DC	LD E10 R130 AC/DC	LD E10 R230 AC/DC
Green	LD E10 G12 AC/DC	LD E10 G28 AC/DC	LD E10 G48 AC/DC	LD E10 G130 AC/DC	LD E10 G230 AC/DC
Yellow	LD E10 Y12 AC/DC	LD E10 Y28 AC/DC	LD E10 Y48 AC/DC	LD E10 Y130 AC/DC	LD E10 Y230 AC/DC
Amber	LD E10 A12 AC/DC	LD E10 A28 AC/DC	LD E10 A48 AC/DC	LD E10 A130 AC/DC	LD E10 A230 AC/DC
Blue	LD E10 B12 AC/DC	LD E10 B28 AC/DC	LD E10 B48 AC/DC	LD E10 B130 AC/DC	LD E10 B230 AC/DC
White	LD E10 W12 AC/DC	LD E10 W28 AC/DC	LD E10 W48 AC/DC	LD E10 W130 AC/DC	LD E10 W230 AC/DC

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive




Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD.BA7S

Led lamps - High luminous intensity - Single chips - large angle - with bridge rectifier - no polarity

Dimensions mm



Supply voltage	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc
Current	15.0 mA	14.0 mA	10.0 mA
Red	LD BA7S R28 AC/DC	LD BA7S W48 AC/DC	LD BA7S R130 AC/DC
Green	LD BA7S G28 AC/DC		LD BA7S G130 AC/DC
Yellow	LD BA7S Y28 AC/DC		LD BA7S Y130 AC/DC
Blue	LD BA7S B28 AC/DC		LD BA7S B130 AC/DC
White	LD BA7S W28 AC/DC		LD BA7S W130 AC/DC

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14




Votive



Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

Dimensions mm


Supply voltage	24-28 Vac/dc	48 Vac/dc
Current	15.0 mA	14.0 mA
Red	LD MG R28 AC/DC	LD MG R48 AC/DC
Green	LD MG G28 AC/DC	LD MG G48 AC/DC
Yellow	LD MG Y28 AC/DC	LD MG Y48 AC/DC
Blue	LD MG B28 AC/DC	
White	LD MG W28 AC/DC	

All Led Lamps Production
BA9s

E10

BA7s

Midget Grooved

T5,5 and T5,5k

BA15d and BA15s

E14

Votive



Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD.T5,5

Led lamps - High luminous intensity - Single chips - large angle

Dimensions mm

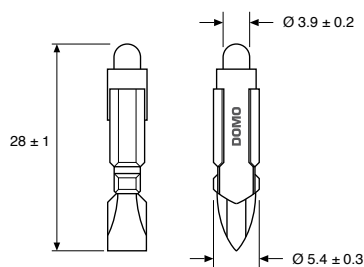

Supply voltage	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc
Current	15.0 mA	14.0 mA	10.0 mA
Red	LD T5,5 R28 PD	LD T5,5 R48 PD	LD T5,5 R130 PD
Green	LD T5,5 G28 PD	LD T5,5 G48 PD	LD T5,5 G130 PD
Yellow	LD T5,5 Y28 PD	LD T5,5 Y48 PD	LD T5,5 Y130 PD
Blue	LD T5,5 B28 PD	LD T5,5 B48 PD	LD T5,5 B130 PD
White	LD T5,5 W28 PD	LD T5,5 W48 PD	LD T5,5 W130 PD

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive




Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD.T5,5k

Led lamps - High luminous intensity - Single chips - large angle

Dimensions mm

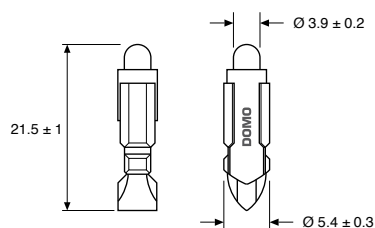

Supply voltage	24-28 Vac/dc	48 Vac/dc
Current	15.0 mA	14.0 mA
Red	LD T5,5K R28 PD	LD T5,5K R48 PD
Green	LD T5,5K G28 PD	LD T5,5K G48 PD
Yellow	LD T5,5K Y28 PD	LD T5,5K Y48 PD
Blue	LD T5,5K B28 PD	
White	LD T5,5K W28 PD	

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive




Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD.E14

**Led lamps - High luminous intensity -
large angle - with bridge rectifier - no polarity**

Dimensions mm



frontal with 5 Led

Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD E14 F R12 AC/DC	LD E14 F R28 AC/DC	LD E14 F R48 AC/DC	LD E14 F R130 AC/DC	LD E14 F R230 AC
Green	LD E14 F G12 AC/DC	LD E14 F G28 AC/DC	LD E14 F G48 AC/DC	LD E14 F G130 AC/DC	LD E14 F G230 AC
Yellow	LD E14 F Y12 AC/DC	LD E14 F Y28 AC/DC	LD E14 F Y48 AC/DC	LD E14 F Y130 AC/DC	LD E14 F Y230 AC
Amber	LD E14 F A12 AC/DC	LD E14 F A28 AC/DC	LD E14 F A48 AC/DC	LD E14 F A130 AC/DC	LD E14 F A230 AC
Blue	LD E14 F B12 AC/DC	LD E14 F B28 AC/DC	LD E14 F B48 AC/DC	LD E14 F B130 AC/DC	LD E14 F B230 AC
White	LD E14 F W12 AC/DC	LD E14 F W28 AC/DC	LD E14 F W48 AC/DC	LD E14 F W130 AC/DC	LD E14 F W230 AC

frontal and lateral with 12 Led

Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD E14 R12 AC/DC	LD E14 R28 AC/DC	LD E14 R48 AC/DC	LD E14 R130 AC/DC	LD E14 R230 AC
Green	LD E14 G12 AC/DC	LD E14 G28 AC/DC	LD E14 G48 AC/DC	LD E14 G130 AC/DC	LD E14 G230 AC
Yellow	LD E14 Y12 AC/DC	LD E14 Y28 AC/DC	LD E14 Y48 AC/DC	LD E14 Y130 AC/DC	LD E14 Y230 AC
Amber	LD E14 A12 AC/DC	LD E14 A28 AC/DC	LD E14 A48 AC/DC	LD E14 A130 AC/DC	LD E14 A230 AC
Blue	LD E14 B12 AC/DC	LD E14 B28 AC/DC	LD E14 B48 AC/DC	LD E14 B130 AC/DC	LD E14 B230 AC
White	LD E14 W12 AC/DC	LD E14 W28 AC/DC	LD E14 W48 AC/DC	LD E14 W130 AC/DC	LD E14 W230 AC

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive




Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD.BA15D

**Led lamps - High luminous intensity -
large angle - with bridge rectifier - no polarity**

Dimensions mm



frontal with 5 Led

Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD BA15D F R12 AC/DC	LD BA15D F R28 AC/DC	LD BA15D F R48 AC/DC	LD BA15D F R130 AC/DC	LD BA15D F R230 AC
Green	LD BA15D F G12 AC/DC	LD BA15D F G28 AC/DC	LD BA15D F G48 AC/DC	LD BA15D F G130 AC/DC	LD BA15D F G230 AC
Yellow	LD BA15D F Y12 AC/DC	LD BA15D F Y28 AC/DC	LD BA15D F Y48 AC/DC	LD BA15D F Y130 AC/DC	LD BA15D F Y230 AC
Amber	LD BA15D F A12 AC/DC	LD BA15D F A28 AC/DC	LD BA15D F A48 AC/DC	LD BA15D F A130 AC/DC	LD BA15D F A230 AC
Blue	LD BA15D F B12 AC/DC	LD BA15D F B28 AC/DC	LD BA15D F B48 AC/DC	LD BA15D F B130 AC/DC	LD BA15D F B230 AC
White	LD BA15D F W12 AC/DC	LD BA15D F W28 AC/DC	LD BA15D F W48 AC/DC	LD BA15D F W130 AC/DC	LD BA15D F W230 AC

frontal e lateral with 12 Led

Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD BA15D R12 AC/DC	LD BA15D R28 AC/DC	LD BA15D R48 AC/DC	LD BA15D R130 AC/DC	LD BA15D R230 AC
Green	LD BA15D G12 AC/DC	LD BA15D G28 AC/DC	LD BA15D G48 AC/DC	LD BA15D G130 AC/DC	LD BA15D G230 AC
Yellow	LD BA15D Y12 AC/DC	LD BA15D Y28 AC/DC	LD BA15D Y48 AC/DC	LD BA15D Y130 AC/DC	LD BA15D Y230 AC
Amber	LD BA15D A12 AC/DC	LD BA15D A28 AC/DC	LD BA15D A48 AC/DC	LD BA15D A130 AC/DC	LD BA15D A230 AC
Blue	LD BA15D B12 AC/DC	LD BA15D B28 AC/DC	LD BA15D B48 AC/DC	LD BA15D B130 AC/DC	LD BA15D B230 AC
White	LD BA15D W12 AC/DC	LD BA15D W28 AC/DC	LD BA15D W48 AC/DC	LD BA15D W130 AC/DC	LD BA15D W230 AC

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive




Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD.BA15S

**Led lamps - High luminous intensity -
large angle - with bridge rectifier - no polarity**

Dimensions mm



frontal with 5 Led

Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD BA15S F R12 AC/DC	LD BA15S F R28 AC/DC	LD BA15S F R48 AC/DC	LD BA15S F R130 AC/DC	LD BA15S F R230 AC
Green	LD BA15S F G12 AC/DC	LD BA15S F G28 AC/DC	LD BA15S F G48 AC/DC	LD BA15S F G130 AC/DC	LD BA15S F G230 AC
Yellow	LD BA15S F Y12 AC/DC	LD BA15S F Y28 AC/DC	LD BA15S F Y48 AC/DC	LD BA15S F Y130 AC/DC	LD BA15S F Y230 AC
Amber	LD BA15S F A12 AC/DC	LD BA15S F A28 AC/DC	LD BA15S F A48 AC/DC	LD BA15S F A130 AC/DC	LD BA15S F A230 AC
Blue	LD BA15S F B12 AC/DC	LD BA15S F B28 AC/DC	LD BA15S F B48 AC/DC	LD BA15S F B130 AC/DC	LD BA15S F B230 AC
White	LD BA15S F W12 AC/DC	LD BA15S F W28 AC/DC	LD BA15S F W48 AC/DC	LD BA15S F W130 AC/DC	LD BA15S F W230 AC

frontal e lateral with 12 Led

Supply voltage	12 Vac/dc	24-28 Vac/dc	48 Vac/dc	110-130 Vac/dc	230 Vac
Current	18.0 mA	15.0 mA	14.0 mA	10.0 mA	6.0 mA
Red	LD BA15S R12 AC/DC	LD BA15S R28 AC/DC	LD BA15S R48 AC/DC	LD BA15S R130 AC/DC	LD BA15S R230 AC
Green	LD BA15S G12 AC/DC	LD BA15S G28 AC/DC	LD BA15S G48 AC/DC	LD BA15S G130 AC/DC	LD BA15S G230 AC
Yellow	LD BA15S Y12 AC/DC	LD BA15S Y28 AC/DC	LD BA15S Y48 AC/DC	LD BA15S Y130 AC/DC	LD BA15S Y230 AC
Amber	LD BA15S A12 AC/DC	LD BA15S A28 AC/DC	LD BA15S A48 AC/DC	LD BA15S A130 AC/DC	LD BA15S A230 AC
Blue	LD BA15S B12 AC/DC	LD BA15S B28 AC/DC	LD BA15S B48 AC/DC	LD BA15S B130 AC/DC	LD BA15S B230 AC
White	LD BA15S W12 AC/DC	LD BA15S W28 AC/DC	LD BA15S W48 AC/DC	LD BA15S W130 AC/DC	LD BA15S W230 AC

All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive



Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request


E10

Supply voltage	24V
Current	21.0 mA
Amber White	LD CIM E10 A28 LD CIM E10 W28

E14

Supply voltage	24V
Current	21.0 mA
Amber White	LD CIM E14 A28 LD CIM E14 W28

Dimensions mm

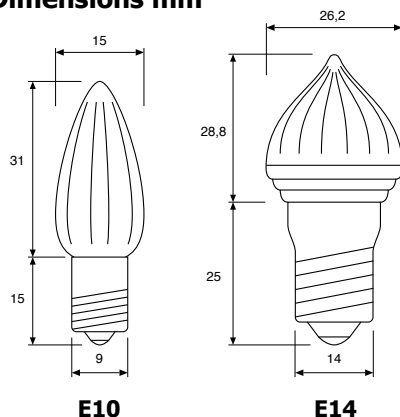

Potenza assorbita	Numero dei LED utilizzati	Angolo di diffusione	Intensità flusso luminoso
0,5 W	4 585/595 nm	O - 360° V - >120°	7,20 lm 600 mcd

All Led Lamps Production



Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request

LD4 Economy Led Lamps


Led lamps - High luminous intensity

E14

Supply voltage	24-28 V
Current	15.0 mA
Red	LD4 E14 R28
Green	LD4 E14 G28
Yellow	LD4 E14 Y28
Amber	LD4 E14 A28
Blue	LD4 E14 B28
White	LD4 E14 W28



Dimensions mm




BA15D or BA15S

Supply voltage	48 V
Current	14.0 mA
Red	LD4 BA15 R48
Green	LD4 BA15 G48
Yellow	LD4 BA15 Y48
Amber	LD4 BA15 A48
Blue	LD4 BA15 B48
White	LD4 BA15 W48



Dimensions mm



All Led Lamps Production

BA9s



E10



BA7s



Midget Grooved



T5,5 and T5,5k



BA15d and BA15s



E14



Votive



Supply Voltage: +/-10%
Working temperature: -20 +60°C

Operating life at TA 25°C: > 100.000 h
Other models and power supply on request



LED LAMPS ■ LAMPES À LED ■ LED LAMPEN ■ LÁMPARAS DE LED ■ LAMPADE A LED



DOMO s.r.l.
20098 - SAN GIULIANO MILANESE - Italy
Via Leone Tolstói, 34
Tel. +39 2.98 24 05 40 - Fax +39 2.98 48 60 1
e-mail: domo@domo.it
web: www.domo.it

