

Data sheet

Commercial Art.No.: R1.188.2000.0

Device for monitoring of safety-related circuits SNO4062K-C AC/DC 24V (C)

Base unit, single-channel or dual-channel control, automatic-/manual reset with reset switch monitoring, 2 enabling current paths, 1 signalling out put, AC/DC 24 V 50-60Hz, push-in-terminals pluggable

1011011010001010010101101
0100110110010110100101010
101001101100111001010010
10110100101010101001000
1101010011011001011010010
10101010010101101010011

DIGITALIZATION IN PROGRESS

Commercial Art.No.	R1.188.2000.0
EAN	4046521297433
Order Unit	1

Certificates / Approvals



Technical data

General

Function display	3 LED, green
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Permissible torque min.	0.5 Nm
Permissible torque max.	0.6 Nm
Tightening moment	0.6 Nm
Wire range cage clamp terminals	2 x 0,25mm ² - 1,5mm ²
Weight	0.21 kg
Standards	EN ISO 13849-1EN 62061; EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	0
Rail mounting possible	Yes

Connection Data

Detachable clamps	Yes
Type of electric connection	Spring clamp connection

Application

Model	Basic device
Suitable for monitoring of magnetic switches	Yes

Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

Output circuit

Enabling paths	Normally open contact
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Max. thermal current I_{th} , enabling paths	6 A
Max. thermal current I_{th} , signaling paths	3 A
Max. total current I^2 of all current path	9 A ²
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 2,5A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral
Mechanical life	10 ⁷ switching cycles
Outputs, signalling function, undelayed, with contact	1
Outputs, safe, undelayed, with contact	2

Control circuit

Input current (safety circuit / reset circuit)	40 mA
max. peak current (safety circuit / reset circuit)	100 mA
Response time tA1	40 ms
Response time tA2	500 ms
Min. switch-on time	50 ms
Recovery time tW	> 40 ms
Release time tR	25 ms
Synchronous time tS	200 ms
Permissible test pulse time tTP	1 ms
max. resistivity, per channel	$\leq (5 + (1,176 \times U_B / U_N - 1) \times 100) \Omega$
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

Supply circuit

Nominal voltage U_N	AC/DC 24 V
Rated consumption AC	4.4 VA
Rated consumption DC	2 W
Rated frequency min.	50 Hz
Rated frequency max.	60 Hz
Operating voltage min.	20.4 V
Operating voltage max.	26.4 V
Electrical isolation supply circuit - control circuit	No
Min. rated control supply voltage at AC 50 Hz	20.4 V
Max. rated AC voltage for controls, 50 Hz	26.4 V
Min. rated DC voltage for controls	20.4 V
Max. rated DC voltage for controls	26.4 V
Min. rated control supply voltage at DC	20.4 V
Rated control supply voltage at AC 60HZ	20.4 V

Rated control supply voltage at AC 50HZ	26.4 V
---	--------

Dimensions

Depth	114 mm
Width	22.5 mm
Height	106.5 mm

Classification

ECLASS 8.1	27371819
ETIM 7.0	EC001449
ETIM 6.0	EC001449
ETIM 5.0	EC001449
ETIM 4.0	EC001449
ETIM 3.0	EC001449

Safety parameters

Category (ISO 13849-1)	4
PL (ISO 13849-1)	Level e
SIL _{CL} (IEC 62061)	3
PFD _d (Low demand mode)	7.3 E-6
PFH _d (High demand mode)	1.7 E-9 1/h
HFT	1
SSF	99.5 %
DC	99 %
MTTF _d	78 a
λS	1458 FIT
λD	1458 FIT
λDU	1443 FIT
λDD	15 FIT
T _M	20 a
Proof test intervall (High demand mode)	20 a
Proof test intervall (Low demand mode)	1 a

Teile Nr. / Part No.
R1.188.1940.0
R1.188.1950.0
R1.188.1960.0
R1.188.1970.0
R1.188.1980.0
R1.188.1990.0
R1.188.2000.0
R1.188.2010.0
R1.188.2020.0
R1.188.2390.0
R1.188.2410.0
R1.188.2420.0
R1.188.2430.0
R1.188.2440.0
R1.188.2450.0
R1.188.3400.0
R1.188.3410.0
R1.188.3420.0
R1.188.3430.0
R1.188.3490.0
R1.188.3600.0

Teile Nr. / Part No.
R1.188.3610.0
R1.188.3630.0
R1.188.3650.0
R1.188.3670.0
R1.188.3730.0
R1.188.3820.0
R1.188.3850.0
R1.188.3860.0
R1.188.3900.0
R1.188.3920.0
R1.188.3940.0
R1.188.4000.0
R1.188.4010.0
R1.188.4030.0
R1.188.4130.0
R1.188.4140.0
R1.188.4150.0
R1.188.4160.0
R1.188.4210.0
R1.188.5000.0




Ⓓ

Ⓑ

Ⓒ

Ⓔ

Ⓕ

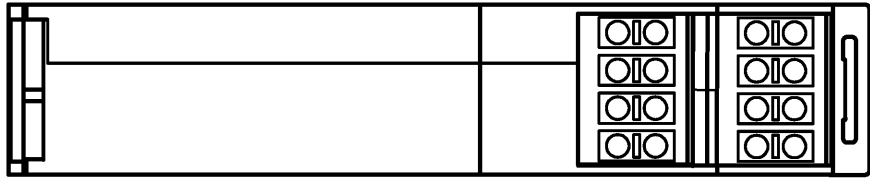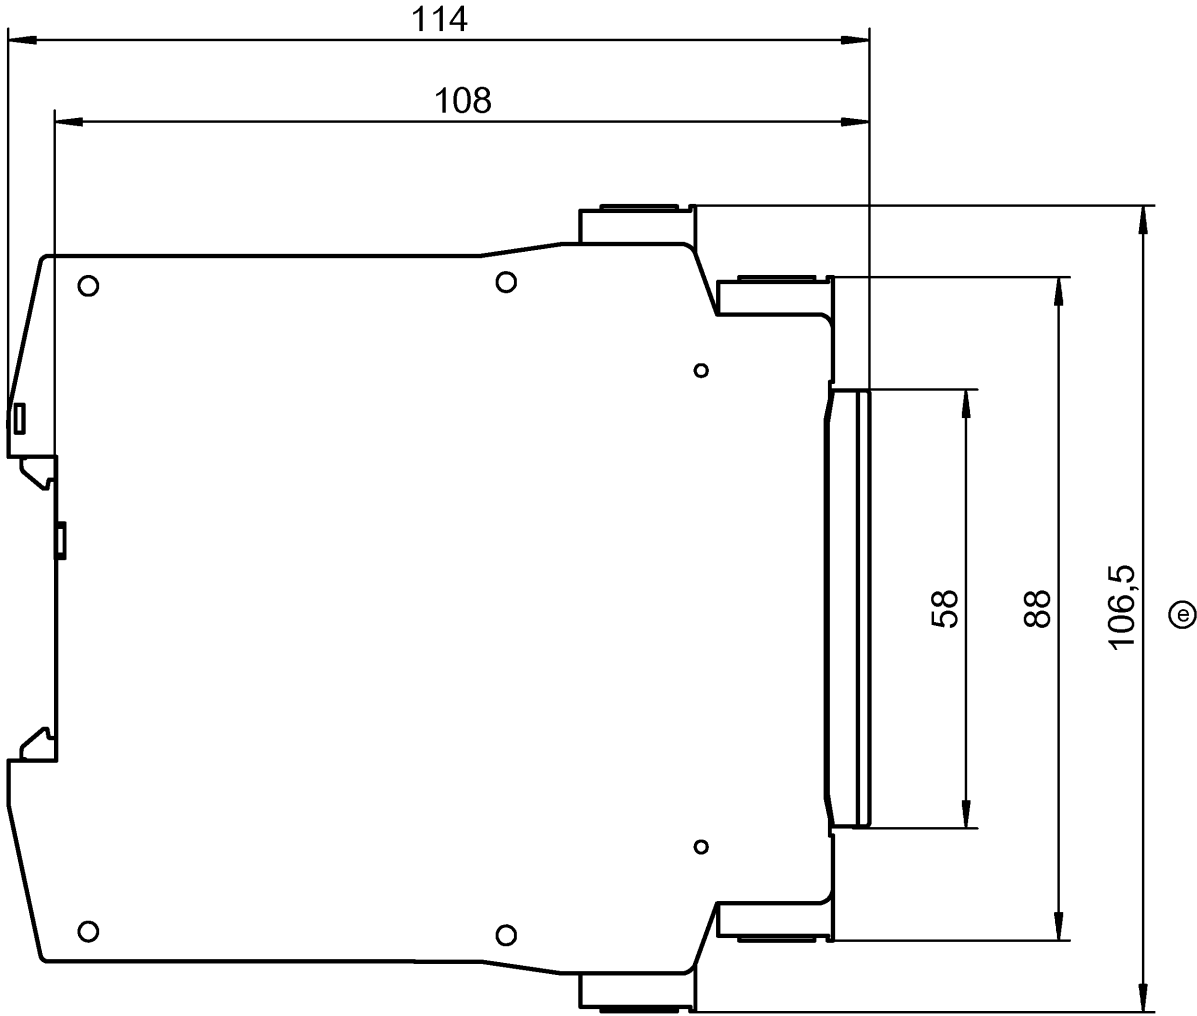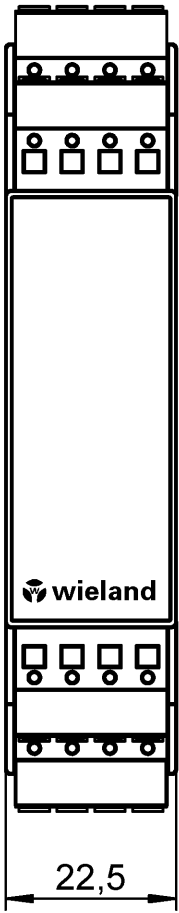

Weitere Angaben siehe KATALOG oder eKatalog.
Additional data see CATALOG or eCatalog.

www.wieland-electric.com
eshop.wieland-electric.com

ja/yes ☐ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!										
Freitoleranz nach General tolerance				CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: Sheet:	
Index		Datum/Blatt Date/Sheet		Datei/File:		Ersatz für/Replacement for:		Zeichnung Nr./Drawing No.		
Ⓕ		03.02.15		036141_F01K.DCD				T R1.188.1940.0 01K		
Ⓓ		22.04.16						Maße in mm/Dimensions are in mm		
Ⓒ		03.07.15								
Ⓑ		30.06.15								
Ⓔ		26.08.16								
Ⓕ		09.08.19								
Werkstoff/Material		Maßstab/Scale		2014 gezeichnet drawn		Tag/Date 06.06.		Name Koetzner		
				geprüft checked						
				Normgepr. Stand. check						
www.wieland-electric.com				Type		Benennung/Title		Maßbildzeichnung/Dimension drawing Standardgehäuse u. -deckel, Baubreite 22,5mm, Federkraftklemme steckbar Standard housing and cover, overall width 22,5mm plug-in spring-clamp terminal		