


Unit Code	Description
TM1-1273050-HXHP	Termoelectric module




GENERAL SPECIFICATIONS		Hot Side Temperature (T_h) = 25°C
Max. Current (I_{max})	5.0	A
Max. Voltage (V_{max})	15.2	V
Max. Heat Pumping Capacity ($Q_{c,max}$)	47.1	W
Max. Temperature Differential (ΔT_{max})	66.0	°C

DIMENSIONS		
a	30.0 ± 0.5	mm
b	30.0 ± 0.5	mm
h	2.9 ± 0.2	mm

ADDITIONAL DATA		
Rated temperature range	-50 ~ +125	°C
Flatness and parallelism	0.02	
Lead wires	20 AWG	
Length of wires	650	mm
Silicone rubber sealing anticorrosion protection		

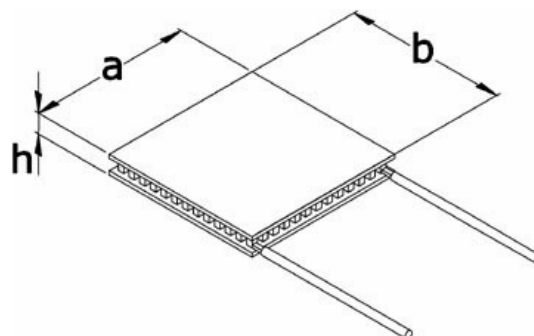

PERFORMANCE CURVES

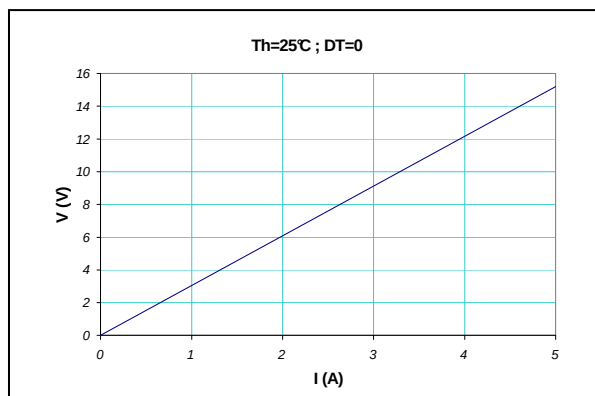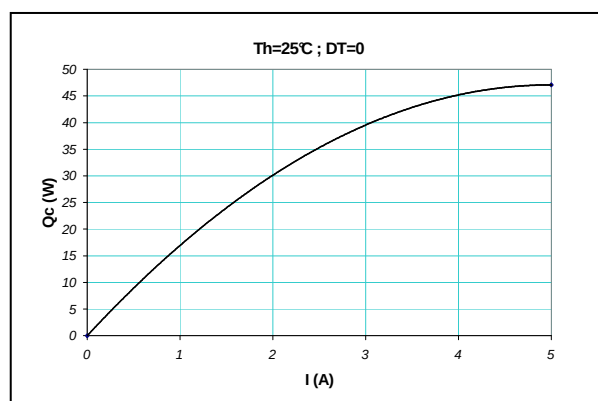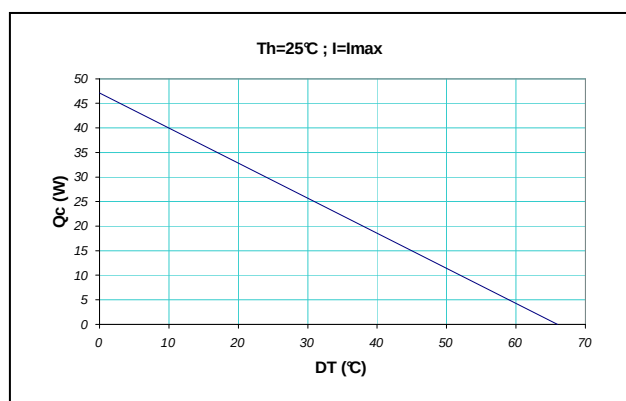

Please refer to our terms of sale including our warranty and limited liabilities clauses.