


COSTECH FAN

Description: **d.c. axial fan 80x80x25 mm**

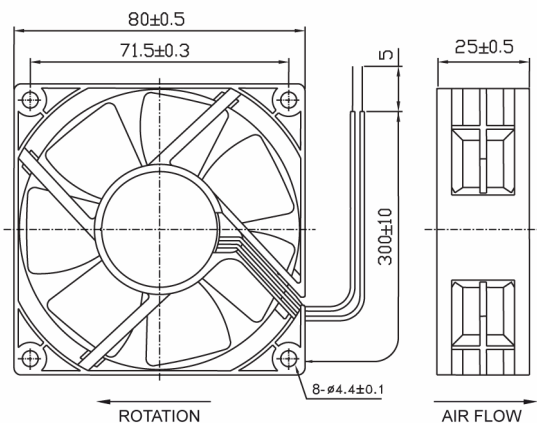

Casing material:

Black fibreglass reinforced plastic (PBT)
UL 94V-0

Impeller material

Black fibreglass reinforced plastic (PBT)
UL 94V-0

Protection degree:

IP20, according to EN 60529 standard

Fixing system:

by 2x4 holes Ø4.4mm

Motor protection:

by IC

Storage temperature:

from -40°C to +70°C

Rated temperature range:

from -10°C to +70°C

Lifetime L10 at 40°C:

70,000 h

Electrical connection:


2 lead wires 24AWG UL 1007, length 300mm

Approvals:

UL E223195

Weight:

86g

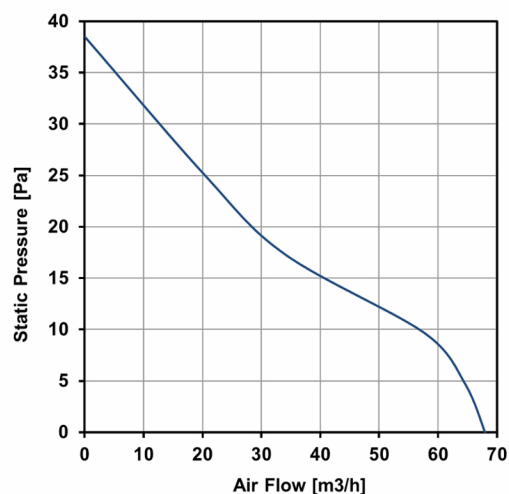

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D08A07HWBA00	Ball	48 V d.c.	0.110	5.28	68	38	33.4	3,000	CE; cURus

data with uncertainty of 10%