



"D04DZ" SERIES COSTECH FANS IP55

Description: **c.c. axial fan 40x40x20 mm**

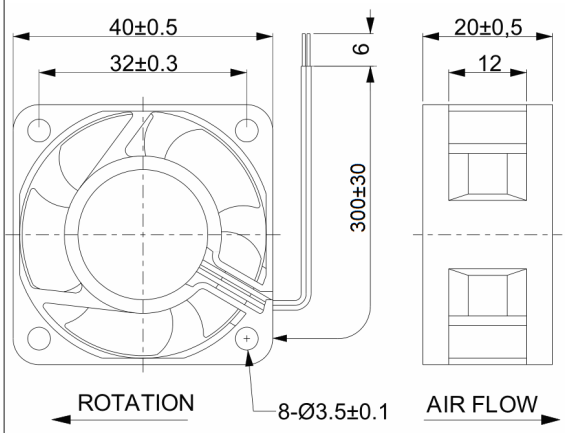

Casing material:	Black fibreglass reinforced plastic (PBT) UL 94V-0
Impeller material:	Black fibreglass reinforced plastic (PBT) UL 94V-0
Protection degree:	IP55, according to EN 60529 standard
Fixing system:	4 holes $\varnothing 3.5$ mm
Motor protection:	IC
Storage temperature:	from -40°C to $+70^{\circ}\text{C}$
Rated temperature range:	from -10°C to $+70^{\circ}\text{C}$
Lifetime L10 at 40°C:	70,000 h
Electrical connection:	2 leads 26AWG UL 1007, 300 mm long
Weight:	28 g
Approvals:	UL E223195

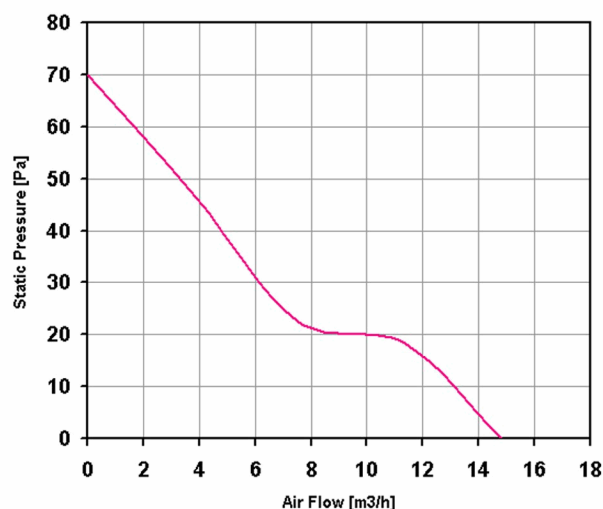

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D04D05HWPZF0	Ball	24 V d.c.	0.090	2.16	15	70	36.0	7,800	CE; cURus