



"D12BZ" SERIES COSTECH FANS

Description: **Axial c.c. 120x120x38 mm**

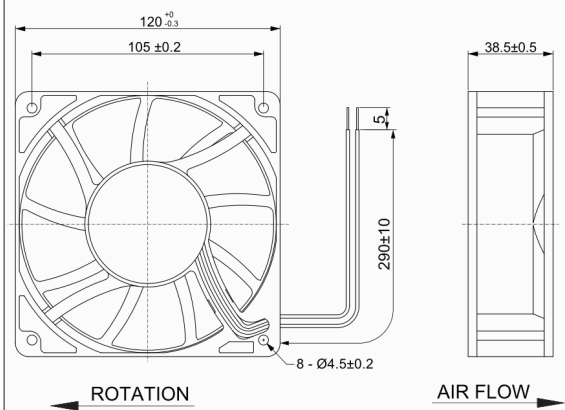

Casing material:	Aluminum alloy
Impeller material:	Black fibreglass reinforced plastic (PBT) UL 94V-0
Protection degree:	IP20, according to EN 60529 standard
Fixing system:	by No. 4 M4 screws
Motor protection:	IC
Storage temperature:	from -40°C to $+70^{\circ}\text{C}$
Rated temperature range:	from -10°C to $+70^{\circ}\text{C}$
Lifetime L10 at 40°C:	70,000 h
Electrical connection:	2 leads 24AWG UL 1007, 290 mm long
Weight:	390 g

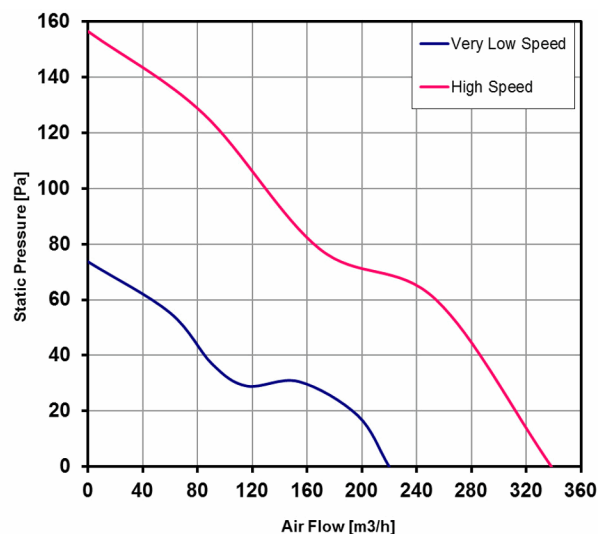

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D12B05HWBA91	Ball	24 V d.c.	0.98	23.5	340	155	61.0	4,300	CE; cURus; TUV
D12B05VWBA91	Ball	24 V d.c.	0.300	7.2	220	74	48.5	2,800	CE; cURus

data with uncertainty of 15%