


"DC1GA" SERIES COSTECH FANS

Description: **Axial c.c. 120x120x31 mm**

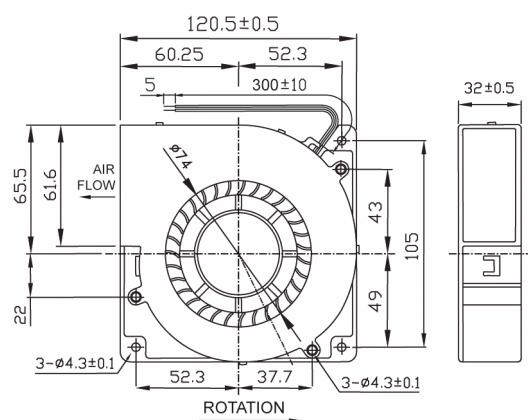

Casing material:

Black fibreglass reinforced plastic (PBT) UL 94V-0

Impeller material

Black fibreglass reinforced plastic (PBT) UL 94V-0

Protection degree:

IP20, according to EN 60529 standard

Fixing system:

by No. 4 M4 screws

Motor protection:

IC

Storage temperature:

from -40°C to +70°C

Rated temperature range:

from -10°C to +70°C

Lifetime L10 at 40°C:

70,000 h at 40°C

Electrical connection:


2 leads 24AWG UL 1007, 300 mm long.

Weight:

251g

Approvals:

UL E223195

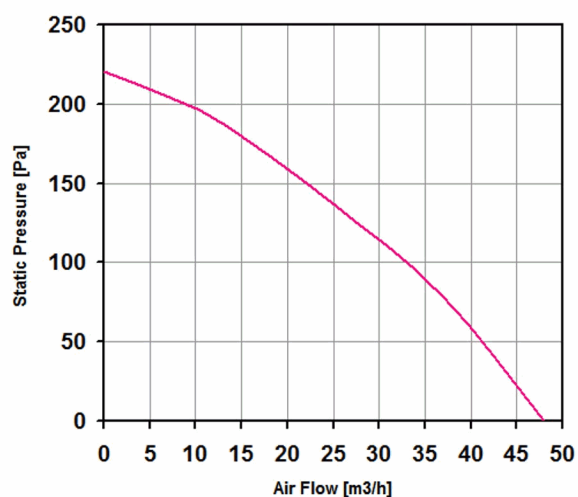

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
DC1G05MWBA01	Ball	24 V d.c.	0.390	9.4	48	220	49.0	2,300	CE; cURus